

## Подшипниковый узел MONOBLOC RCM 60-1 AS (стандартный вал) CHIARAVALLI

### ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Крепление винта – M16

M [mm] – 25

G [mm] – 171

H [mm] – 175

I [mm] – 497

T [mm] – 80

N [mm] – 840

L [mm] – 570

F [mm] – 130

V [mm] – 180

S [mm] – 230


C [mm] – 60

P [mm] – 18

E [mm] – 86

U [mm] – 448

Вес [кг] – 49

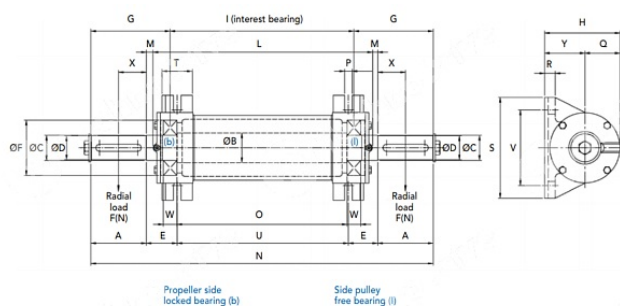

[WWW.TECHNODRIVE.PRO](http://WWW.TECHNODRIVE.PRO)



8 (800) 707-99-68

+7 (863) 223-20-99

[info@technodrive.pro](mailto:info@technodrive.pro)

Россия, 344064, Ростов-на-Дону, ул. Вавилова, 68, оф. 23