

Подшипниковый узел MONOBLOC RCM 70-1 AS (стандартный вал) CHIARAVALLI

ТЕХНИЧЕСКИЕ ХАРАКТЕРИСТИКИ

Крепление винта – M16

M [mm] – 12

G [mm] – 192

H [mm] – 190

I [mm] – 492

T [mm] – 90

N [mm] – 878

L [mm] – 574

F [mm] – 150

V [mm] – 190

S [mm] – 250


C [mm] – 70

P [mm] – 20

E [mm] – 75

U [mm] – 448

Вес [кг] – 61

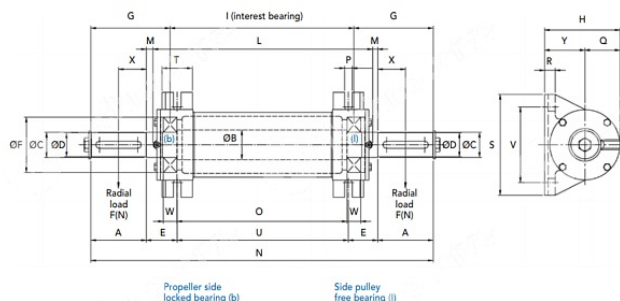

WWW.TECHNODRIVE.PRO



8 (800) 707-99-68

+7 (863) 223-20-99

info@technodrive.pro

Россия, 344064, Ростов-на-Дону, ул. Вавилова, 68, оф. 23