


NNU
 Tapered Bore

Bearing Numbers		Abutment and Fillet Dimensions (mm)							Mass (kg)	Boundary Dimensions (mm)						Basic Load Ratings (N)		Limiting Speeds (min ⁻¹)	
Cylindrical Bore	Tapered Bore ⁽¹⁾	$d_a^{(2)}$		d_{1a} min.	d_c min.	D_a		r_a max.	approx.	d	D	B	r min.	F_W	E_W	C_r	C_{0r}	Grease	Oil
		min.	max.			min.	max.												
NN 3005	NN 3005 K	29	—	29	—	43	42	0.6	0.127	150	210	60	2	167	—	350 000	715 000	2 600	3 200
NN 3006	NN 3006 K	35	—	36	—	50	50	1	0.198		225	56	2.1	—	206	335 000	585 000	2 600	3 000
NN 3007	NN 3007 K	40	—	41	—	57	56	1	0.258	160	220	60	2	177	—	365 000	760 000	2 400	3 000
NN 3008	NN 3008 K	45	—	46	—	63	62	1	0.309		240	60	2.1	—	219	375 000	660 000	2 400	2 800
NN 3009	NN 3009 K	50	—	51	—	70	69	1	0.407	170	230	60	2	187	—	375 000	805 000	2 400	2 800
NN 3010	NN 3010 K	55	—	56	—	75	74	1	0.436		260	67	2.1	—	236	450 000	805 000	2 200	2 600
NN 3011	NN 3011 K	61.5	—	62	—	83.5	83	1	0.647	180	250	69	2	200	—	480 000	1 020 000	2 200	2 600
NN 3012	NN 3012 K	66.5	—	67	—	88.5	88	1	0.693		280	74	2.1	—	255	565 000	995 000	2 000	2 400
NN 3013	NN 3013 K	71.5	—	72	—	93.5	93	1	0.741	190	260	69	2	211.5	—	485 000	1 060 000	2 000	2 600
NN 3014	NN 3014 K	76.5	—	77	—	103.5	102	1	1.06		290	75	2.1	—	265	595 000	1 080 000	2 000	2 400
NN 3015	NN 3015 K	81.5	—	82	—	108.5	107	1	1.11	200	280	80	2.1	223	—	570 000	1 220 000	1 900	2 400
NN 3016	NN 3016 K	86.5	—	87	—	118.5	115	1	1.54		310	82	2.1	—	282	655 000	1 170 000	1 800	2 200
NN 3017	NN 3017 K	91.5	—	92	—	123.5	120	1	1.63	220	300	80	2.1	243	—	600 000	1 330 000	1 700	2 200
NN 3018	NN 3018 K	98	—	99	—	132	129	1.5	2.09		340	90	3	—	310	815 000	1 480 000	1 700	2 000
NN 3019	NN 3019 K	103	—	104	—	137	134	1.5	2.19	240	320	80	2.1	263	—	625 000	1 450 000	1 600	2 000
											360	92	3	—	330	855 000	1 600 000	1 500	1 800
NNU 4920	NNU 4920 K	106.5	111	108	115	133.5	—	1	1.9	260	360	100	2.1	289	—	935 000	2 100 000	1 400	1 800
NN 3020	NN 3020 K	108	—	109	—	142	139	1.5	2.28		400	104	4	—	364	1 030 000	1 920 000	1 400	1 700
NNU 4921	NNU 4921 K	111.5	116	113	120	138.5	—	1	1.99	280	380	100	2.1	309	—	960 000	2 230 000	1 300	1 700
NN 3021	NN 3021 K	114	—	115	—	151	148	2	2.88		420	106	4	—	384	1 080 000	2 080 000	1 300	1 500
NNU 4922	NNU 4922 K	116.5	121	118	125	143.5	—	1	2.07										
NN 3022	NN 3022 K	119	—	121	—	161	157	2	3.71	300	420	118	3	336	—	1 230 000	2 870 000	1 200	1 500
											460	118	4	—	418	1 290 000	2 460 000	1 200	1 400
NNU 4924	NNU 4924 K	126.5	133	128	137	158.5	—	1	2.85										
NN 3024	NN 3024 K	129	—	131	—	171	167	2	4.04	320	440	118	3	356	—	1 260 000	3 050 000	1 100	1 400
											480	121	4	—	438	1 350 000	2 670 000	1 100	1 300
NNU 4926	NNU 4926 K	138	143	140	148	172	—	1.5	3.85										
NN 3026	NN 3026 K	139	—	141	—	191	185	2	5.88	340	520	133	5	—	473	1 670 000	3 300 000	1 000	1 200
NNU 4928	NNU 4928 K	148	153	150	158	182	—	1.5	4.08										
NN 3028	NN 3028 K	149	—	151	—	201	195	2	6.34	360	540	134	5	—	493	1 700 000	3 450 000	950	1 200

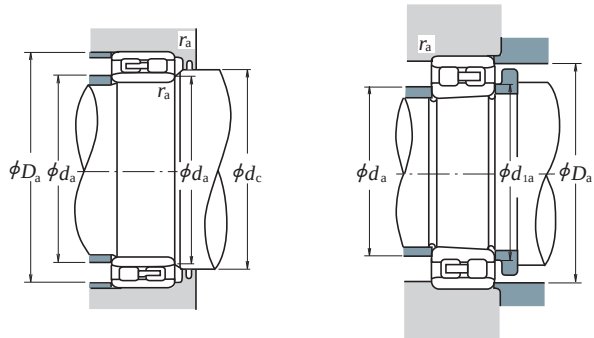

Bearing Numbers		Abutment and Fillet Dimensions (mm)							Mass (kg)
Cylindrical Bore	Tapered Bore ⁽¹⁾	$d_a^{(2)}$		d_{1a}	d_c	D_a	r_a		approx.
		min.	max.	min.	min.	max.	min.	max.	
NNU 4930	NNU 4930 K	159	166	162	171	201	—	2	6.39
NN 3030	NN 3030 K	161	—	162	—	214	209	2	7.77
NNU 4932	NNU 4932 K	169	176	172	182	211	—	2	6.76
NN 3032	NN 3032 K	171	—	172	—	229	222	2	9.41
NNU 4934	NNU 4934 K	179	186	182	192	221	—	2	7.12
NN 3034	NN 3034 K	181	—	183	—	249	239	2	12.8
NNU 4936	NNU 4936 K	189	199	193	205	241	—	2	10.4
NN 3036	NN 3036 K	191	—	193	—	269	258	2	16.8
NNU 4938	NNU 4938 K	199	211	203	217	251	—	2	10.9
NN 3038	NN 3038 K	201	—	203	—	279	268	2	17.8
NNU 4940	NNU 4940 K	211	222	214	228	269	—	2	15.3
NN 3040	NN 3040 K	211	—	214	—	299	285	2	22.7
NNU 4944	NNU 4944 K	231	242	234	248	289	—	2	16.6
NN 3044	NN 3044 K	233	—	236	—	327	313	2.5	29.6
NNU 4948	NNU 4948 K	251	262	254	269	309	—	2	18
NN 3048	NN 3048 K	253	—	256	—	347	334	2.5	32.7
NNU 4952	NNU 4952 K	271	288	275	295	349	—	2	31.1
NN 3052	NN 3052 K	276	—	278	—	384	368	3	47.7
NNU 4956	NNU 4956 K	291	308	295	315	369	—	2	33
NN 3056	NN 3056 K	296	—	298	—	404	388	3	51.1
NNU 4960	NNU 4960 K	313	335	318	343	407	—	2.5	51.9
NN 3060	NN 3060 K	316	—	319	—	444	422	3	70.7
NNU 4964	NNU 4964 K	333	355	338	363	427	—	2.5	54.9
NN 3064	NN 3064 K	336	—	340	—	464	442	3	76.6
NN 3068	NN 3068 K	360	—	365	—	500	477	4	102
NN 3072	NN 3072 K	380	—	385	—	520	497	4	106

Note ⁽²⁾ d_a (max.) are values for adjusting rings for the NNU Type.