



SUPPORTI A CARTUCCIA - CYLINDRICAL CARTRIDGE UNITS



UCC2 Serie normale - Standard duty

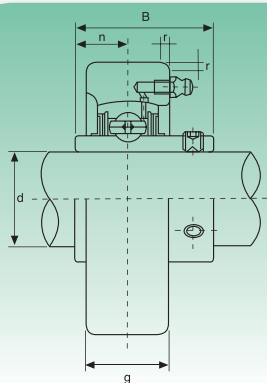

Tipo Type	Dimensioni - Dimensions						Coefficienti di carico (N) Load ratings (N)		Cuscinetto Bearing	Supporto Housing	Peso Weight
	d	a	g	r	B	n	Dinamico C Dynamic C	Statico C ₀ Static C ₀			
	mm/inch										kg
UCC201	12	72	20	2	31	12,7	12160	6318	UC201	C204	0,52
UCC201-8	½	2,8346	25/32	0,079	1,2205	0,500			UC201-8		0,51
UCC202	15	72	20	2	31	12,7	12160	6318	UC202	C204	0,51
UCC202-9	9/16	2,8346	25/32	0,079	1,2205	0,500			UC202-9		0,51
UCC202-10	5/8						UC202-10	0,51			
UCC203	17	72	20	2	31	12,7	12160	6318	UC203	C204	0,50
UCC203-11	11/16	2,8346	25/32	0,079	1,2205	0,500			UC203-11		0,49
UCC204	20	72	20	2	31	12,7	12160	6318	UC204	C204	0,48
UCC204-12	¾	2,8346	25/32	0,079	1,2205	0,500			UC204-12		0,48
UCC205	25	80	22	2	34,1	14,3	13300	7457	UC205	C205	0,63
UCC205-13	13/16	3,1496	55/64	0,079	1,3425	0,563			UC205-13		0,67
UCC205-14	7/8								UC205-14		0,66
UCC205-15	15/16								UC205-15		0,64
UCC205-16	1								UC205-16		0,63
UCC206	30						85	27	2	38,1	15,9
UCC206-17	11/16	3,3465	11/16	0,079	1,5000	0,626	UC206-17	0,83			
UCC206-18	11/8						UC206-18	0,82			
UCC206-19	13/16						UC206-19	0,80			
UCC206-20	1¼						UC206-20	0,79			
UCC207	35						90	28	2	42,9	17,5
UCC207-20	1¼	3,5433	17/64	0,079	1,6890	0,689	UC207-20	0,99			
UCC207-21	15/16						UC207-21	0,96			
UCC207-22	13/8						UC207-22	0,93			
UCC207-23	17/16						UC207-23	0,90			
UCC208	40						100	30	2,5	49,2	19
UCC208-24	1½	3,9370	13/16	0,098	1,9370	0,748	UC208-24	1,26			
UCC208-25	19/16						UC208-25	1,23			
UCC209	45						110	31	2,5	49,2	19
UCC209-26	15/8	4,3307	17/32	0,098	1,9370	0,748	UC209-26	1,59			
UCC209-27	111/16						UC209-27	1,55			
UCC209-28	1¾						UC209-28	1,51			
UCC210	50						120	33	2,5	51,6	19
UCC210-29	113/16	4,7244	119/64	0,098	2,0315	0,748	UC210-29	2,02			
UCC210-30	17/8						UC210-30	1,97			
UCC210-31	115/16						UC210-31	1,92			
UCC210-32	2						UC210-32	1,88			
UCC211	55						125	35	2,5	55,6	22,2
UCC211-32	2	4,9213	13/8	0,098	2,1890	0,874	UC211-32	2,33			
UCC211-33	21/16						UC211-33	2,27			
UCC211-34	21/8						UC211-34	2,22			
UCC211-35	23/16						UC211-35	2,16			
UCC212	60						130	38	2,5	65,1	25,4
UCC212-36	2¼	5,1181	1½	0,098	2,5630	1,000	UC212-36	2,65			
UCC212-37	25/16						UC212-37	2,57			
UCC212-38	23/8						UC212-38	2,50			
UCC212-39	27/16						UC212-39	2,43			
UCC213	65						140	40	3	65,1	25,4
UCC213-40	2½	5,5118	137/64	0,118	2,5630	1,000	UC213-40	3,07			
UCC213-41	29/16						UC213-41	2,98			

Disponibile in acciaio inox Supporto: AISI 304 - Cuscinetto: AISI 440C o 420C - Available stainless steel Housing: AISI 304 - Bearing: AISI 440C or 420C
Disponibile su richiesta con cuscinetto SA (SACC) - Available under request with SA bearing (SACC)