




CUSCINETTI A SFERE SIGILLATI CON GRANI DI BLOCCAGGIO - SEALED BALL BEARINGS WITH SET SCREWS

UC2 Serie normale - Standard duty

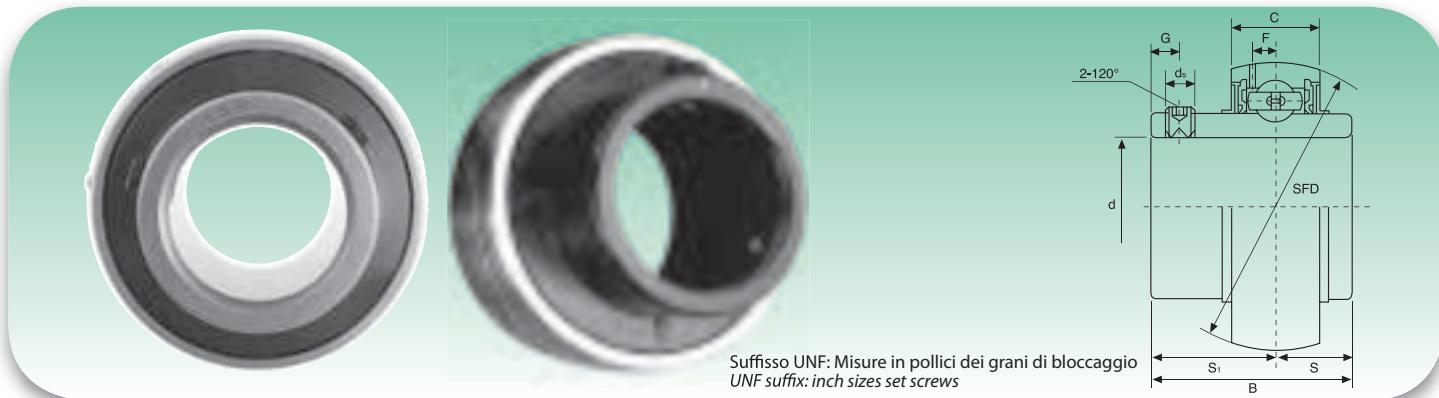

Tipo Type	Dimensioni - Dimensions										Coefficients di carico (N) Load ratings (N)		Peso Weight kg
	d	D	B	C	S	S ₁	G	ds	F	Dinamico C Dynamic C	Statico C ₀ Static C ₀		
	mm/inch												
UC201 UC201-8	12 ½	47 1,8504	31 1,2205	17 0,6693	12,7 0,500	18,3 0,720	4,8 0,189	M6x1 ¼-28UNF	3,7 0,146	12160	6318	0,20 0,19	
UC202 UC202-9 UC202-10	15 9/16 5/8	47 1,8504	31 1,2205	17 0,6693	12,7 0,500	18,3 0,720	4,8 0,189	M6x1 ¼-28UNF	3,7 0,146	12160	6318	0,19 0,19 0,19	
UC203 UC203-11	17 11/16	47 1,8504	31 1,2205	17 0,6693	12,7 0,500	18,3 0,720	4,8 0,189	M6x1 ¼-28UNF	3,7 0,146	12160	6318	0,18 0,17	
*UC204 UC204-12	20 ¾	47 1,8504	31 1,2205	17 0,6693	12,7 0,500	18,3 0,720	4,8 0,189	M6x1 ¼-28UNF	3,7 0,146	12160	6318	0,16 0,16	
*UC205 UC205-13 UC205-14 UC205-15 UC205-16	25 13/16 7/8 15/16 1	52 2,0472	34,1 1,3425	17 0,6693	14,3 0,563	19,8 0,780	5 0,197	M6x1 ¼-28UNF	3,9 0,154	13300	7457	0,20 0,24 0,23 0,21 0,20	
*UC206 UC206-17 UC206-18 UC206-19 UC206-20	30 11/16 11/8 13/16 1¼	62 2,4409	38,1 1,5000	19 0,7480	15,9 0,626	22,2 0,874	5 0,197	M6x1 ¼-28UNF	5,0 0,197	18525	10735	0,32 0,33 0,34 0,32 0,31	
*UC207 UC207-20 UC207-21 UC207-22 UC207-23	35 1¼ 15/16 13/8 17/16	72 2,8346	42,9 1,6890	20 0,7874	17,5 0,689	25,4 1,000	7 0,276	M8x1 5/16-24UNF	5,7 0,224	24415	14630	0,48 0,54 0,51 0,48 0,45	
*UC208 UC208-24 UC208-25	40 1½ 19/16	80 3,1496	49,2 1,9370	21 0,8268	19 0,748	30,2 1,189	8 0,315	M8x1 5/16-24UNF	6,2 0,244	27645	16910	0,64 0,68 0,65	
*UC209 UC209-26 UC209-27 UC209-28	45 15/8 111/16 1¾	85 3,3465	49,2 1,9370	22 0,8661	19 0,748	30,2 1,189	8 0,315	M8x1 5/16-24UNF	6,4 0,252	32395	20235	0,68 0,78 0,74 0,70	
*UC210 UC210-29 UC210-30 UC210-31 UC210-32	50 113/16 17/8 115/16 2	90 3,5433	51,6 2,0315	24 0,9449	19 0,748	32,6 1,283	10 0,394	M10x1 3/8-24UNF	6,5 0,256	33345	22135	0,80 0,92 0,87 0,82 0,78	
*UC211 UC211-32 UC211-33 UC211-34 UC211-35	55 2 21/16 21/8 23/16	100 3,9370	55,6 2,1890	25 0,9843	22,2 0,874	33,4 1,315	10 0,394	M10x1 3/8-24UNF	7,0 0,276	41230	27930	1,11 1,26 1,20 1,15 1,09	
*UC212 UC212-36 UC212-37 UC212-38 UC212-39	60 2¼ 25/16 23/8 27/16	110 4,3307	65,1 2,5630	27 1,0630	25,4 1,000	39,7 1,563	10 0,394	M10x1 3/8-24UNF	7,6 0,299	49780	34390	1,54 1,67 1,59 1,52 1,45	
UC213 UC213-40 UC213-41	65 2½ 29/16	120 4,7244	65,1 2,5630	28 1,1024	25,4 1,000	39,7 1,563	10 0,394	M10x1 3/8-24UNF	8,5 0,335	54340	38095	1,85 1,94 1,85	
UC214 UC214-42 UC214-43 UC214-44	70 25/8 211/16 2¾	125 4,9213	74,6 2,9370	29 1,1417	30,2 1,189	44,4 1,748	12 0,472	M12x1,5 7/16-20UNF	8,9 0,350	59090	41895	2,05 2,26 2,16 2,06	
UC215 UC215-45 UC215-46 UC215-47 UC215-48	75 213/16 27/8 215/16 3	130 5,1181	77,8 3,0630	30 1,1811	33,3 1,311	44,5 1,752	12 0,472	M12x1,5 7/16-20UNF	9,2 0,362	64030	45885	2,21 2,46 2,35 2,24 2,12	
UC216 UC216-49 UC216-50 UC216-51	80 31/16 31/8 33/16	140 5,5118	82,6 3,2520	32 1,2598	33,3 1,311	49,3 1,9409	12 0,472	M12x1,5 7/16-20UNF	9,5 0,374	69065	50350	2,80 2,98 2,85 2,72	
UC217 UC217-52 UC217-53 UC217-55	85 3¼ 35/16 37/16	150 5,9055	85,7 3,3740	34 1,3386	34,1 1,343	51,6 2,031	12 0,472	M12x1,5 7/16-20UNF	10,2 0,402	79800	58805	3,46 3,68 3,54 3,25	
UC218 UC218-56	90 3½	160 6,2992	96 3,7795	36 1,4173	39,7 1,5630	56,3 2,217	12 0,472	M12x1,5 7/16-20UNF	11,2 0,441	91295	67925	4,36 4,47	

Disponibile in acciaio inox AISI 440C o 420C - Available stainless steel AISI 440C or 420C

*Fornito con schermo antipolvere a stella, grano con sfera e anello interno brunito - Equipped with anti-rust shield star shape, screw with ball and burnished inner ring