


SUPPORTI A FLANGIA OVALE - OVAL BEARING UNITS



SALF2 - SBLF2

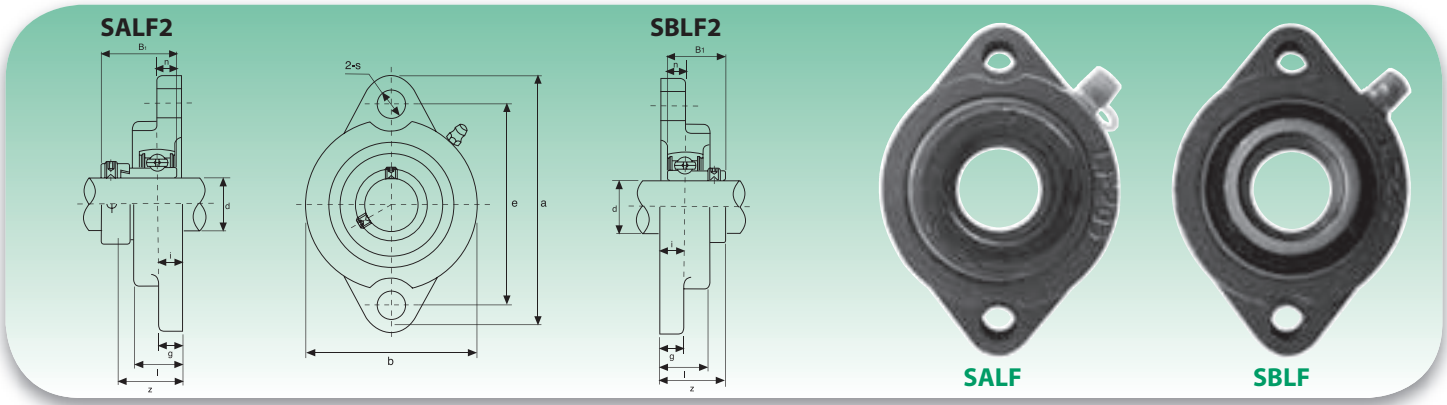

Tipo Type	Dimensioni - Dimensions								Bull. fiss. Bolt Size	SALF			Cuscinetto Bearing	Peso Weight	SBLF			Cuscinetto Bearing	Peso Weight	Supporto Housing	Coefficienti di carico (N) Load ratings (N)	
	d	a	e	b	i	s	g	l		z	B <sub>1</sub>	n			z	B <sub>1</sub>	n				Dinamico C Dynamic C	Statico C <sub>0</sub> Static C <sub>0</sub>
	mm/inch									mm/inch					mm/inch							
<b>SALF-SBLF</b> <b>201</b> 201-8	12 ½	81 33/16	63,5 2½	56 2 1/8	9,5 3/8	8 5/16	9,5 3/8	18 45/64	M6 ¼	31,6 1¼	28,6 1,1260	6,5 0,2559	<b>SA201</b> SA201-8	0,3 1	25,5 0,8661	22 0,2362	6	<b>SB201</b> SB201-8	0,3	<b>LF203</b>	9200	4480
<b>SALF-SBLF</b> <b>202</b> 202-9 202-10	15 9/16 5/8	81 33/16	63,5 2½	56 2 1/8	9,5 3/8	8 5/16	9,5 3/8	18 45/64	M6 ¼	31,6 1¼	28,6 1,1260	6,5 0,2559	<b>SA202</b> SA202-9 SA202-10	0,3 1	25,5 0,8661	22 0,2362	6	<b>SB202</b> SB202-9 SB202-10	0,3	<b>LF203</b>	9200	4480
<b>SALF-SBLF</b> <b>203</b> 203-11	17 11/16	81 33/16	63,5 2½	56 2 1/8	9,5 3/8	8 5/16	9,5 3/8	18 45/64	M6 ¼	31,6 1¼	28,6 1,1260	6,5 0,2559	<b>SA203</b> SA203-11	0,3 1	25,5 0,8661	22 0,2362	6	<b>SB203</b> SB203-11	0,3	<b>LF203</b>	9200	4480
<b>SALF-SBLF</b> <b>204</b> 204-12	20 ¾	90 35/64	71,5 2 13/64	61 2 13/64	11 7/16	10 25/64	11 7/16	20 25/32	M8 5/16	34,5 1 23/64	31 1,2204	7,5 0,2953	<b>SA204</b> SA204-12	0,4 19/64	29 0,9843	25 0,2756	7	<b>SB204</b> SB204-12	0,3	<b>LF204</b>	12200	6300
<b>SALF-SBLF</b> <b>205</b> 205-13 205-14 205-15 205-16	25 13/16 7/8 15/16 1	95 3 3/4	76 2 3/64	64 2 3/64	11 7/16	10 25/64	11 7/16	20 25/32	M8 5/16	34,5 1 23/64	31 1,2204	7,5 0,2953	<b>SA205</b> SA205-13 SA205-14 SA205-15 SA205-16	0,5 113/64	30,5 1,0630	27 0,2953	7,5	<b>SB205</b> SB205-13 SB205-14 SB205-15 SB205-16	0,4	<b>LF205</b>	13300	7460
<b>SALF-SBLF</b> <b>206</b> 206-17 206-18 206-19 205-20	30 11/16 11/8 13/16 1¼	113 47/16	90,5 3 9/16	76 3	12 15/32	12 15/32	12 15/32	22,5 57/64	M10 3/8	38,7 1 33/64	35,7 1,4055	9 0,3543	<b>SA206</b> SA206-17 SA206-18 SA206-19 SA206-20	0,7 111/32	34 1,1811	30 0,3150	8	<b>SB206</b> SB206-17 SB206-18 SB206-19 SB206-20	0,6	<b>LF206</b>	18500	10800
<b>SALF-SBLF</b> <b>207</b> 207-20 207-21 207-22 205-23	35 1¼ 15/16 13/8 17/16	122 4 13/16	100 3 15/16	89 3 1/2	13 33/64	12 15/32	13 33/64	24 61/64	M10 3/8	42,4 1 43/64	38,9 1,5315	9,5 0,3740	<b>SA207</b> SA207-20 SA207-21 SA207-22 SA207-23	0,9 17/16	36,5 1,2598	32 0,3346	8,5	<b>SB207</b> SB207-20 SB207-21 SB207-22 SB207-23	0,8	<b>LF207</b>	24500	14600